

AC-CXWP-~~XXXX~~00KIT

WHEN PAIRED WITH THE AC-EX100-UHD-R3
THE WALL PLATES ARE ABLE TO TRANSMIT 4K
AT 70 METERS OR 1080P AT 100 METERS. EDID
MANAGEMENT IS AVAILABLE ON THIS RECEIVER.

AC-CXWP-~~XXXX~~00KIT

WHEN PAIRED WITH THE AC-EX70-UHD-R
THE WALL PLATE IS ABLE TO TRANSMIT 4K
AT 40 METERS 1080P AT 70 METERS. EDID
MANAGEMENT IS NOT AVAILABLE FOR THIS
RECEIVER BUT IS STILL AVAILABLE ON THE WALL
PLATE.

INSTALLATION OF THE WALL PLATE EXTENDERS AND CONNECTION ORDER:

- 1) MOUNT THE WALL PLATE IN THE MUD RING.
- 2) CONNECT CATEGORY CABLE BETWEEN THE WALL PLATE AND THE RECEIVER*
- 3) PLUG IN THE POWER INTO THE RECEIVER. THE WALL PLATE TRANSMITTER WILL RECEIVE POWER FROM THE RECEIVER THROUGH THE CAT CABLE (POE)**
- 4) PLUG IN A HDMI CABLE FROM THE RECEIVER TO THE DISPLAY.
- 5) LAST STEP: PLUG IN A HDMI FROM THE SOURCE TO WALL PLATE.
- 6) SOURCE WILL NOW TRANSMIT TO DISPLAY.

*IF THE CAT CABLE IS CONNECTED CORRECTLY A SOLID AMBER LIGHT WITH A FLASHING GREEN LIGHT WILL TURN ON AT THE ETHERNET PORT. THIS MEANS THERE IS A GOOD LINK AND THAT DATA IS BEING TRANSMITTED BETWEEN THE WALL PLATE AND RECEIVER.

**IF YOU WILL BE USING THE UNIT DIRECTLY INTO A NON POE PROVIDER (AVR, PROJECTOR, DISPLAY, OR OTHER HDBASET RECEIVER), YOU CAN POWER IT USING A 5V MINI

INPUT SWITCHING:

EACH WALL PLATE UTILIZES AUTO SENSING TECHNOLOGY. THIS MEANS ONCE A SOURCE IS CONNECTED THE WALL PLATE WILL RECOGNIZE THE CONNECTION AND AUTOMATICALLY SEND THE SIGNAL TO THE DISPLAY.


FOR THE VGA, MDP & USB-C WALL PLATE: IF YOU ALREADY HAVE A SOURCE PLUGGED INTO THE WALL PLATE AND YOU PLUG IN ANOTHER SOURCE THE WALL PLATE WILL AUTOMATICALLY SWITCH TO THE SOURCE THAT WAS JUST PUT IN.

IF YOU HAVE 2 SOURCES PLUGGED INTO THE VGA, MDP & USB-C WALL PLATE YOU CAN SWITCH BETWEEN THE INPUTS BY PRESSING THE SQUARE LIT UP BUTTON. A GREEN LIGHT INDICATES THAT MDP, VGA OR USB-C IS BEING USED AND AN AMBER COLORED LIGHT INDICATES THAT HDMI IS SELECTED.

IF THE ACTIVE SOURCE IS UNPLUGGED IT WILL AUTOMATICALLY SWITCH TO THE OTHER PLUGGED IN SOURCE.

EDID MANAGEMENT:

EDID MANAGEMENT ALLOWS YOU TO MANAGE THE INPUT DEVICE (TYPICALLY THE DISPLAY) TO REQUEST SPECIFIC VIDEO RESOLUTIONS AND/OR AUDIO CODECS FROM A SOURCE. EDID CAN BE TOGGLED USING THE TURN DIAL (LOCATED ON BOTTOM OF UNIT OPPOSITE OF HDBT PORT).

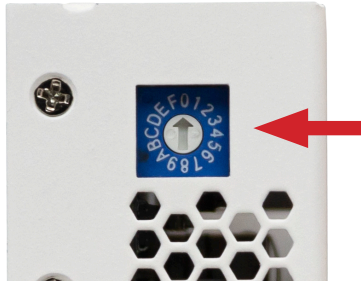

USE A FLATHEAD SCREWDRIVER TO TOGGLE BETWEEN DIFFERENT PRESET EDIDS BY TWISTING THE DIAL TO THE PREFERRED EDID. THE FOLLOWING CHOICES ARE AVAILABLE:

0. 4K60HZ 420 3D 2CH [DEFAULT]
1. 4K60HZ 420 3D 4CH
2. 4K60HZ 420 3D 8CH
3. 4K60HZ 420 HDR BT2020 3D 2CH
4. 4K60HZ 420 HDR BT2020 3D 6CH
5. 4K60HZ 420 HDR BT2020 3D 8CH
6. 4K30HZ RGB 3D 2CH
7. 4K30HZ 444 3D 6CH
8. 4K30HZ 444 3D 8CH
9. 4K30HZ 444HDR BT2020 3D 2CH
- A. 4K30HZ 444HDR BT2020 3D 6CH
- B. 4K30HZ 444HDR BT2020 3D 8CH
- C. 1080P60 RGB 8 BIT 3D 2CH
- D. 1080P60 444 3D 6CH
- E. 1080P60 444 3D 8CH
- F. COPY FROM OUTPUT

WHEN USING PROJECTORS RGB EDID SETTING IS RECOMMENDED.

EDID CAN BE MANAGED USING ALL WALL-PLATE TRANSMITTERS (VGA, HDMO, MDP, USB-C) AND THE EX100-UHD-R3 RECEIVER.

COPYING EDID FROM OUTPUT:

WITH 70-KITS:

- **CONNECT CATEGORY TO TX/RX, HDMI TO DISPLAY, AND BOTH RX AND DISPLAY ARE POWERED**
- **TURN DIAL TO F ON WALL PLATE**

WITH 100-KITS:

- **CONNECT CATEGORY TO TX/RX, HDMI TO DISPLAY, AND BOTH RX AND DISPLAY HAVE POWER**
- **TURN DIAL TO F ON RX**

TROUBLESHOOTING:

HAVING PROBLEMS? HERE ARE SOME GENERAL TROUBLESHOOTING TIPS THAT MAY HELP:

(WE RECOMEND EVERY INTEGRATOR HAVE THE FOX & HOUND TROUBLESHOOTING KIT. THAT WAY YOU HAVE A DEFINITIVE ANSWER WHEN HAVING PROBLEMS WITH HDMI)

- 1. TRY DIFFERENT HDMI CABLES. A DEFECTIVE HDMI CABLE CAN BRING THE ENTIRE SYSTEM DOWN.**
- 2. IF USING SHORT HDMI CABLES (.5M, 1M) TRY A LONGER CABLE. SOME SHORT HDMI CABLES DO NOT SYNC WELL.**
- 3. ENSURE YOU HAVE THE CORRECT EDID SETTINGS SELECTED.**
- 4. RE-TERMINATE THE CATEGORY CABLE (EVEN IF A CABLE TESTER INDICATES THAT THE CABLE IS PASSING SIGNAL).**
- 5. AVOID RJ45EZ CONNECTORS**
- 6. CHECK THE CATEGORY CABLE LENGTH. IT MAY BE TOO LONG.**
- 7. REMOVE ANY EXCESS CATEGORY CABLE AND BE SURE THAT IT IS NOT TWISTED OR DAMAGED.**
- 8. IF YOU ARE STILL HAVING ISSUES AFTER TROUBLESHOOTING, FEEL FREE TO CONTACT OUR TECH SUPPORT DEPARTMENT.**

**HAVE A QUESTION OR NEED ASSISTANCE?
DON'T HESITATE TO CONTACT US!**

**SUPPORT: +1 605-274-6055
USA TOLL FREE: 877-886-5112
EMAIL: SUPPORT@AVPROEDGE.COM**