



# VISUAL PERFORMANCE EXTREME

Introducing the totally redesigned Visual Performance Extreme line of speakers. Engineered to handle harsh conditions while maintaining superior sound quality, Sonance Extreme Speakers are the perfect choice for patios, bathrooms or marine applications.



**VPXT8R**




**VPXT6R**




**VPXT6R SST**



**VPXT6**



**VPXT6SQ**




**VPXT8SQ**

- The XPC grille retention technology ensures the grille is held securely in place even during high pressure washing
- Designed to withstand extreme temperatures from -30° – 175°F (-34°C – 79°C)

- Conforms to IP-66 waterproof rating and Mil Spec 810 for humidity, salt spray, UV and temperature



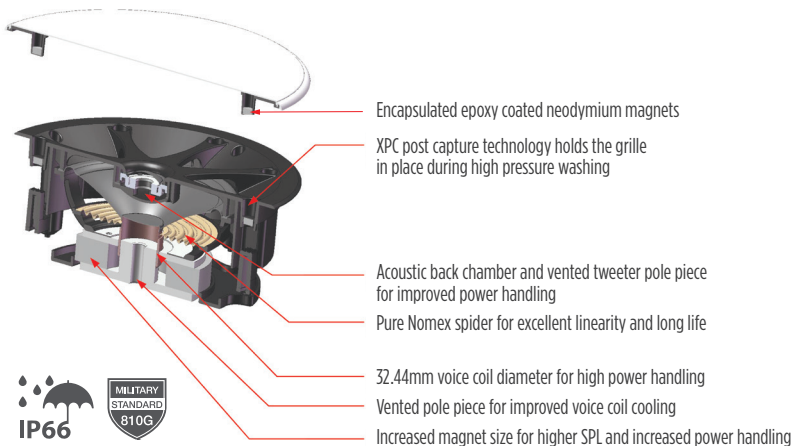

**VPXT8R**  
SKU 93341



**VPXT6R**  
SKU 93339



**VPXT6R SST**  
SKU 93340



**VPXT6**  
SKU 93338

**Tweeter:** 1" (25mm) polyurethane dome, Ferrofluid cooled, in acoustic back chamber

1" (25mm) polyurethane dome, Ferrofluid cooled, in acoustic back chamber

1" (25mm) polyurethane dome, dual voice coil, Ferrofluid cooled, in acoustic back chamber

1" (25mm) polyurethane dome, Ferrofluid cooled, in acoustic back chamber

**Woofers:** 8" (205mm) injection-molded polypropylene/graphite cone, with integral Santoprene™ surround

6 1/2" (165mm) injection-molded polypropylene/graphite cone, with integral Santoprene™ surround

6 1/2" (165mm) injection-molded polypropylene/graphite cone, with integral Santoprene™ surround

6 1/2" (165mm) injection-molded polypropylene/graphite cone, with integral Santoprene™ surround

**Frequency Response:** 40Hz - 20kHz ±3dB

45Hz - 20kHz ±3dB

45Hz - 20kHz ±3dB

45Hz - 20kHz ±3dB

**Power Handling:** 5 Watts minimum; 130 Watts maximum

5 Watts minimum; 125 Watts maximum

5 Watts minimum; 125 Watts maximum

5 Watts minimum; 125 Watts maximum

SONANCE

www.sonance.com